


# BIS Industriezadels



voor stalen buis Ø 1/2 - 10" (21,5 - 273,0 mm)



## Voordelen en kenmerken

- ééndelig zadel
- materiaal: staal
- thermisch verzinkt

| Art.nr.   | D<br>(mm) | D<br>(") | DN<br>(mm) | B<br>(mm) | H<br>(mm) | b x s<br>(mm) | d1<br>(mm) | k<br>(mm) | Ds |
|-----------|-----------|----------|------------|-----------|-----------|---------------|------------|-----------|----|
| 460 8 021 | 21,5      | ½        | 15         | 82        | 24        | 25 x 2,5      | Ø 9        | 52        | 50 |
| 460 8 027 | 26,9      | ¾        | 20         | 88        | 30        | 25 x 2,5      | Ø 9        | 58        | 50 |
| 460 8 033 | 33,7      | 1        | 25         | 94        | 36        | 25 x 2,5      | Ø 9        | 64        | 50 |
| 460 8 042 | 42,4      | 1¼       | 32         | 103       | 45        | 25 x 2,5      | Ø 9        | 73        | 50 |
| 460 8 048 | 48,3      | 1½       | 40         | 109       | 51        | 25 x 2,5      | Ø 9        | 79        | 50 |
| 460 8 060 | 60,3      | 2        | 50         | 120       | 63        | 25 x 2,5      | Ø 9        | 90        | 50 |
| 460 8 077 | 76,1      | 2½       | 65         | 137       | 80        | 25 x 2,5      | Ø 9        | 107       | 50 |
| 460 8 089 | 88,9      | 3        | 80         | 149       | 92        | 25 x 2,5      | Ø 9        | 119       | 50 |
| 460 8 114 | 114,3     | 4        | 100        | 180       | 118       | 30 x 4,0      | Ø 11       | 150       | 50 |
| 460 8 140 | 139,7     | 5        | 125        | 206       | 144       | 30 x 4,0      | Ø 11       | 176       | 25 |
| 460 8 168 | 168,3     | 6        | 150        | 234       | 172       | 40 x 4,0      | Ø 11       | 204       | 20 |
| 460 8 273 | 273,0     | 10       | 250        | 363       | 278       | 40 x 5,0      | 15 x 10,5  | 333       | 20 |

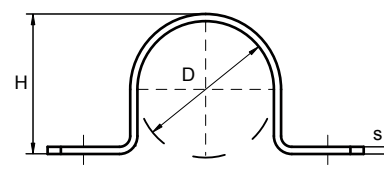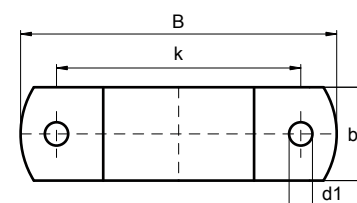

## Alternatief

BIS Pijpzadels (tv)