

Cod. 10137
Cod. 10158

Duplex

Hose reel machines
Enrolladores




Solid set systems
Cobertura integral



Slow reverse impact gun for medium flow with secondary nozzle driven arm

Aspersor de impacto de medio caudal, con retorno lento y brazo oscilante accionado por la boquilla secundaria

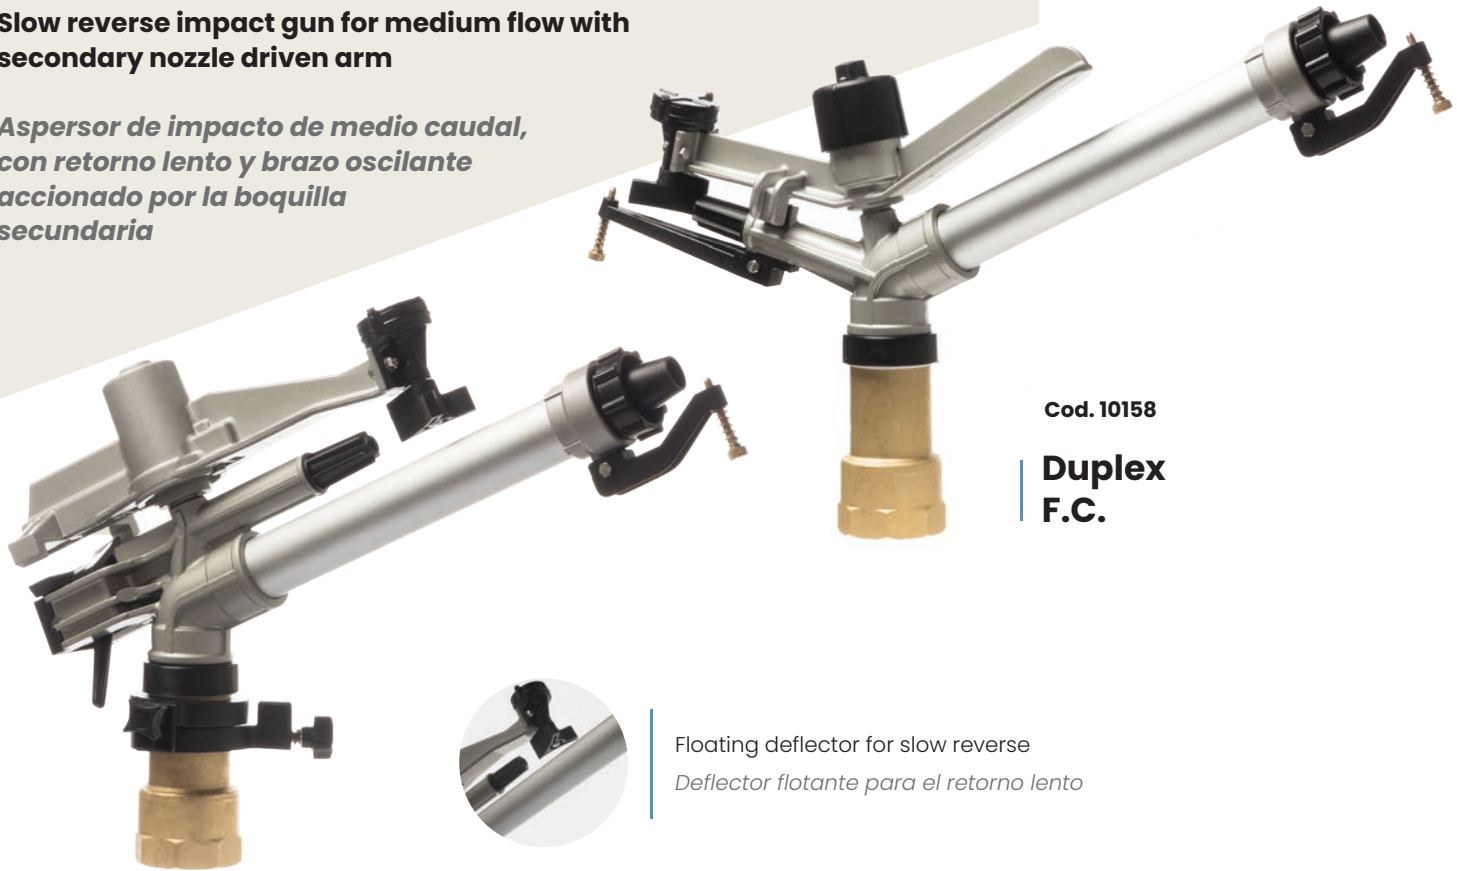

Cod. 10158

**Duplex
F.C.**

Cod. 10137

**Duplex
P.C.**

Net weight
Peso neto

P.C. **3,30 kg**
F.C. **2,63 kg**

Connection
Conexión

2" F

Size
Dimensiones

ø 1496 mm x 360 mm
ø 740 mm x 377 mm

Nozzle
Boquilla

Ø 10 ÷ 22 mm

Angle
Ángulo

25°



Floating deflector for slow reverse
Deflector flotante para el retorno lento

Pressure Presion

for **US units** go to page 71

Nozzle Boquilla	2 bar		3 bar		4 bar		5 bar		6 bar	
	Flow Caudal l/min	Radius Alcance m	Flow Caudal l/min	Radius Alcance m	Flow Caudal l/min	Radius Alcance m	Flow Caudal l/min	Radius Alcance m	Flow Caudal l/min	Radius Alcance m
12 mm - 8 mm	184	23	224	27	259	30	-	-	-	-
14 mm - 8 mm	230	25	280	29	325	32	364	34	-	-
16 mm - 8 mm	282	27	344	31	399	34	446	37	-	-
18 mm - 8 mm	343	28	434	33	506	36	561	40	-	-
20 mm - 8 mm	411	29	520	34	606	38	657	43	-	-
22 mm - 8 mm	-	-	590	34,5	682	39	766	44	839	46,5